



Quality certifications



As ever watchful for quality, since 1998, Comepi is qualified ISO 9002 thus offering its domestic and foreign interlocutors a deeper warranty of its ability to adequately answer the ever increasing need of effective and fruitful relationship.

The update to ISO 9001:2008, made in 2009, confirms the Comepi quality politics. The control of full application of ISO 9000 norms and its timely updating is guaranteed by well tested procedures ranging from control of the process up to the use of statistic techniques.

Comepi personnel, at any given level, is involved in this process in order to achieve the highest end-user satisfaction besides growth of image, competitiveness and profits for the firm.

Limit Switches

Specifications, Directives and Standards	4
Terminology	6
Travel and operating diagrams	7
Description, Symbols and Technical Data - Plastic Casing IP 65	8
Description, Symbols and Technical Data - Metal Casing IP 66	10
Description, Symbols and Technical Data - Plastic and Metal Casing IP 67	12
Implementation	14
Utilization Precautions	15
Accessories and Special Versions	16

Selection Table

AP_T Series (30 mm. Plastic Casing - EN 50047)	18
DP_T Series (50 mm. Plastic Casing)	25
AM_F / AM_T Series (30 mm. Metal Casing - EN 50047)	30
DM_F / DM_T Series (50 mm. Metal Casing)	35
BP_H Series (40 mm. Plastic Casing - EN 50041)	40
BM_P Series (40 mm. Metal Casing)	45
CM_P Series (60 mm. Metal Casing)	46
BM_E Series (40 mm. Metal Casing - EN 50041)	47
CM_E Series (60 mm. Metal Casing)	52
EP1G Series (30 mm. Plastic Casing)	58
EP2G Series (35 mm. Plastic Casing)	62
EM1G Series (30 mm. Metal Casing)	66
EM2G Series (35 mm. Metal Casing)	70
Limit switches for special applications	74

Safety Limit Switches



Summary of available lines	76
----------------------------------	----

Foot Switches

Description PS... / PD... Series	84
Accessories	86
Description MP_ Series	87
Technical Data	88



SUMMARY LIMIT SWITCHES

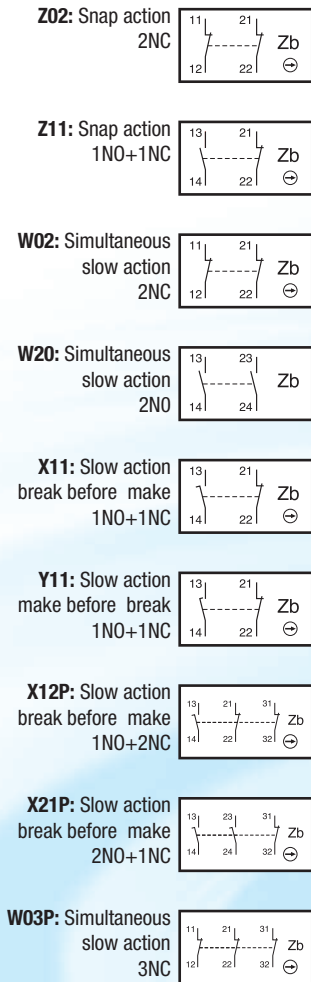

Adapter G Type

AP series (Plastic)



T head type (Plastic)

DP series (Plastic)



T head type (Plastic)

AM series (Metal)



F head type (Metal)
T head type (Plastic)

DM series (Metal)



F head type (Metal)
T head type (Plastic)

BP series (Plastic)




H head type (Plastic)

BM series (Aluminium)



E head type (Aluminium)

Serie CM (alluminio)

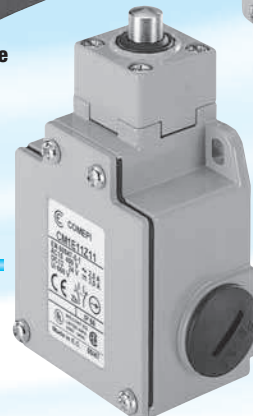


E head type (Aluminium)

Contact blocks

Zb type: double break, electrically separated

Approvals: UL 508 / CSA C22-2 n. 14

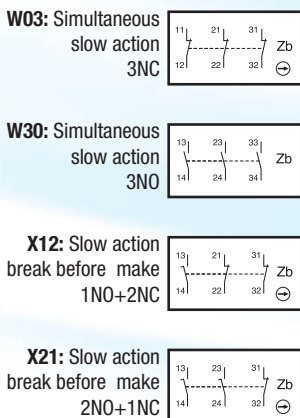

Comepi all over the world

Argentina
Australia
Austria
Belgium
Brazil
Canada
Chile
Colombia
Denmark
Ecuador
Egypty
Finland
France
Germany
Great Britain



Greece
Iran
Ireland
Iceland
Israel
Italy
Malta
The Netherlands
Poland
Portugal
Peru
Spain
United States
South Africa
Sweden
Turkey